

Audéo YES

Product information



Discreet and stylish, Audéo YES is designed for hearing instrument users with mild to severe hearing losses. Audéo YES employs industry leading features, including all CORE

performance and wireless features. Audéo YES is available in three performance/price levels and, with a choice of standard or power receiver, range of domes and tip options.

Features/Functions

	Audéo YES IX	Audéo YES V	Audéo YES III
SoundFlow	Premium	Advanced	Standard
WhistleBlock Technology	■	■	■
ZoomControl	■		
SoundRecover	■	■	■
Directionality	VoiceZoom (33 channels)	VoiceZoom (12 channels)	Adaptive digital AudioZoom
Real Ear Sound	■	■	
SoundRelax	■		
EchoBlock System	■		
WindBlock Management	■	■	
NoiseBlock Processing	20 channels	16 channels	6 channels
DataLogging	■	■	■
Self Learning	■	■	
CableFree Fitting via iCube	■	■	■
Accessories			
iCom	■	■	■
myPilot	■	■	■
iView	■	■	■


Fitting software

- iPGF version 2.3 or higher, NOAH compatible

Hardware

- PC (IBM compatible) with iCube, NOAHlink and/or HI-PRO interface

CableFree Fitting with iCube



1. Switch iCube on and check the Bluetooth connection to the computer



2. Put iCube around the patient's neck and connect the neckloop to the iCube

Programming

Connecting the programming cable to an Audéo YES






1. Open the battery compartment.



2. Plug the programming plug into the socket. Use the programming cable CS-44 A (Phonak version) only.


Key features

The complete range of data sheets is available on www.phonak.com


		Audéo YES IX	Audéo YES V	Audéo YES III
				
Standard xReceiver				
Performance profile				
Maximum Power Output (dB SPL)	2 cc coupler	112	112	112
	Ear Simulator	121	121	121
Maximum gain (dB)	2 cc coupler	44	44	44
	Ear Simulator	56	56	56
Frequency range – Ear Simulator (Hz)		<100 Hz – 8300 Hz	<100 Hz – 8300 Hz	<100 Hz – 8300 Hz
Working current (mA)		1.0 mA	1.0 mA	1.0 mA
Power xReceiver				
Performance profile				
Maximum Power Output (dB SPL)	2 cc coupler	125	125	125
	Ear Simulator	132	132	132
Maximum gain (dB)	2 cc coupler	55	55	55
	Ear Simulator	62	62	62
Frequency range – Ear Simulator (Hz)		<100 Hz – 7000 Hz	<100 Hz – 7000 Hz	<100 Hz – 7000 Hz
Working current (mA)		1.1 mA	1.1 mA	1.1 mA
Standard xReceiver and Power xReceiver				
Battery size		312	312	312
VoiceZoom 33 channels		✓		
VoiceZoom 12 channels			✓	
digital AudioZoom				✓

Fitting ranges



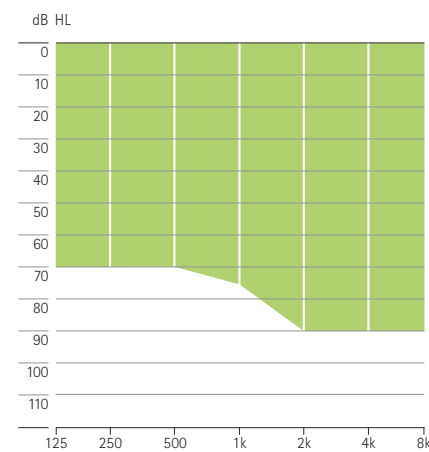



Standard xReceiver

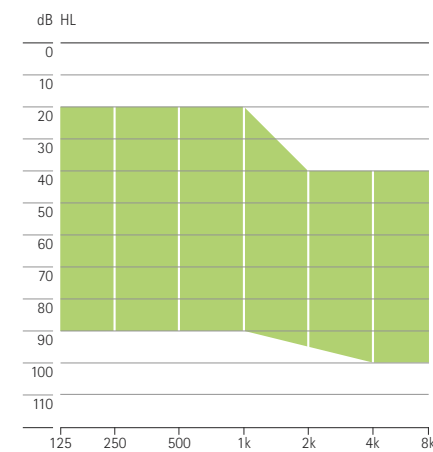

Power xReceiver






Options

	Audéo YES IX	Audéo YES V	Audéo YES III
Standard xReceiver Units (4 different lengths for left and right: 0 – 3)	S	S	S
Power xReceiver Units (4 different lengths for left and right: 0 – 3)	0	0	0
 Open dome (3 different sizes: 5/7/10, two lengths)	xS	xS	xS
 Closed dome (two lengths)	xS/xP	xS/xP	xS/xP
 Power dome (3 different sizes: 9/10/11, two lengths)	xS/xP	xS/xP	xS/xP
 SlimTip	xS	xS	xS
 cShell	xS/xP	xS/xP	xS/xP
 xShell	xP	xP	xP
Choice of 17 colors: Blue Jeans (C4), Beige (01), Taupe (35), Back in Black (84), Classic Caddy (92), Lunar Eclipse (85), Snowblade (93), Precious Metal (86), Royal Velvet (79), Creme Brulee (89), Antique Mahogany (87), Raku Glaze (91), Fery Temper (90), Flower Power (88), Pure Passion (83), Pinot Noir (80), Green with Envy (81)	0	0	0

Note:
Some options are country specific.
Please refer to your local order form.

S = Standard
0 = Optional
xS = Standard xReceiver
xP = Power xReceiver

Accessories

	Audéo YES IX	Audéo YES V	Audéo YES III
myPilot 	✓	✓	✓
iCom with EasyAudio and EasyBluetooth 	✓	✓	✓
iView 	✓	✓	✓

Technical description

- 1 Dual microphone with protector
- 2 Battery compartment with ON/OFF switch
- 3 Serial number (inside battery compartment)
- 4 xReceiver Unit
- 5 Dome/SlimTip/xShell

